

6980 Sierra Center Parkway, Suite 90
Reno, NV 89511

February 13, 2013
File: 1009

Mr. Chris Benna
RILITE AGGREGATES
3025 Mill Street
Reno, NV 89502

RE: Rilite Pit - Fill Sand

Dear Mr. Benna:

Per your request, we have performed testing on the fill sand sampled by our laboratory on February 7th. Test results are as follows:

Sieve Size Analysis (ASTM C136/C117)	
U.S. Standard Sieve Size	Percent By Weight Passing Rilite Pit Fill Sand
3/8 Inch	100
No. 4	99
No. 8	81
No. 16	55
No. 30	36
No. 50	21
No. 100	10
No. 200	5.3

Atterberg Limits (ASTM D4318)	
Liquid Limit	No Value
Plasticity Index	Nonplastic


Moisture Density (ASTM D1557C)	
Maximum Dry Density	108.0 PCF
Optimum Moisture	15.0%

Mr. Chris Benna
RILITE AGGREGATES
February 13, 2013
Page 2

We appreciate this opportunity to provide our laboratory testing services. If you have any questions or require further information, please do not hesitate to contact us.

Sincerely,

CONSTRUCTION MATERIALS ENGINEERS, INC.

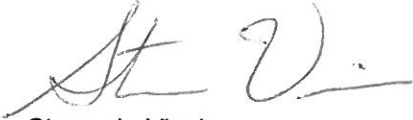

Steven L. Vineis
Laboratory Manager
svineis@cme-corp.com
Direct: 775-737-7568
Direct Fax: 775-737-7605
Mobile: 775-772-9921

Jon A. Del Santo, PE
Project Manager
RE Number 17094
Expiration Date 12-31-14
jdelsto@cme-corp.com
Direct: 775-737-7564
Direct Fax: 775-737-7602
Mobile: 775-846-4399




SLV:JAD:jy
Enclosure

v:\active\1009\2013\fill_sand_02-13-13.doc



MOISTURE DENSITY CURVE

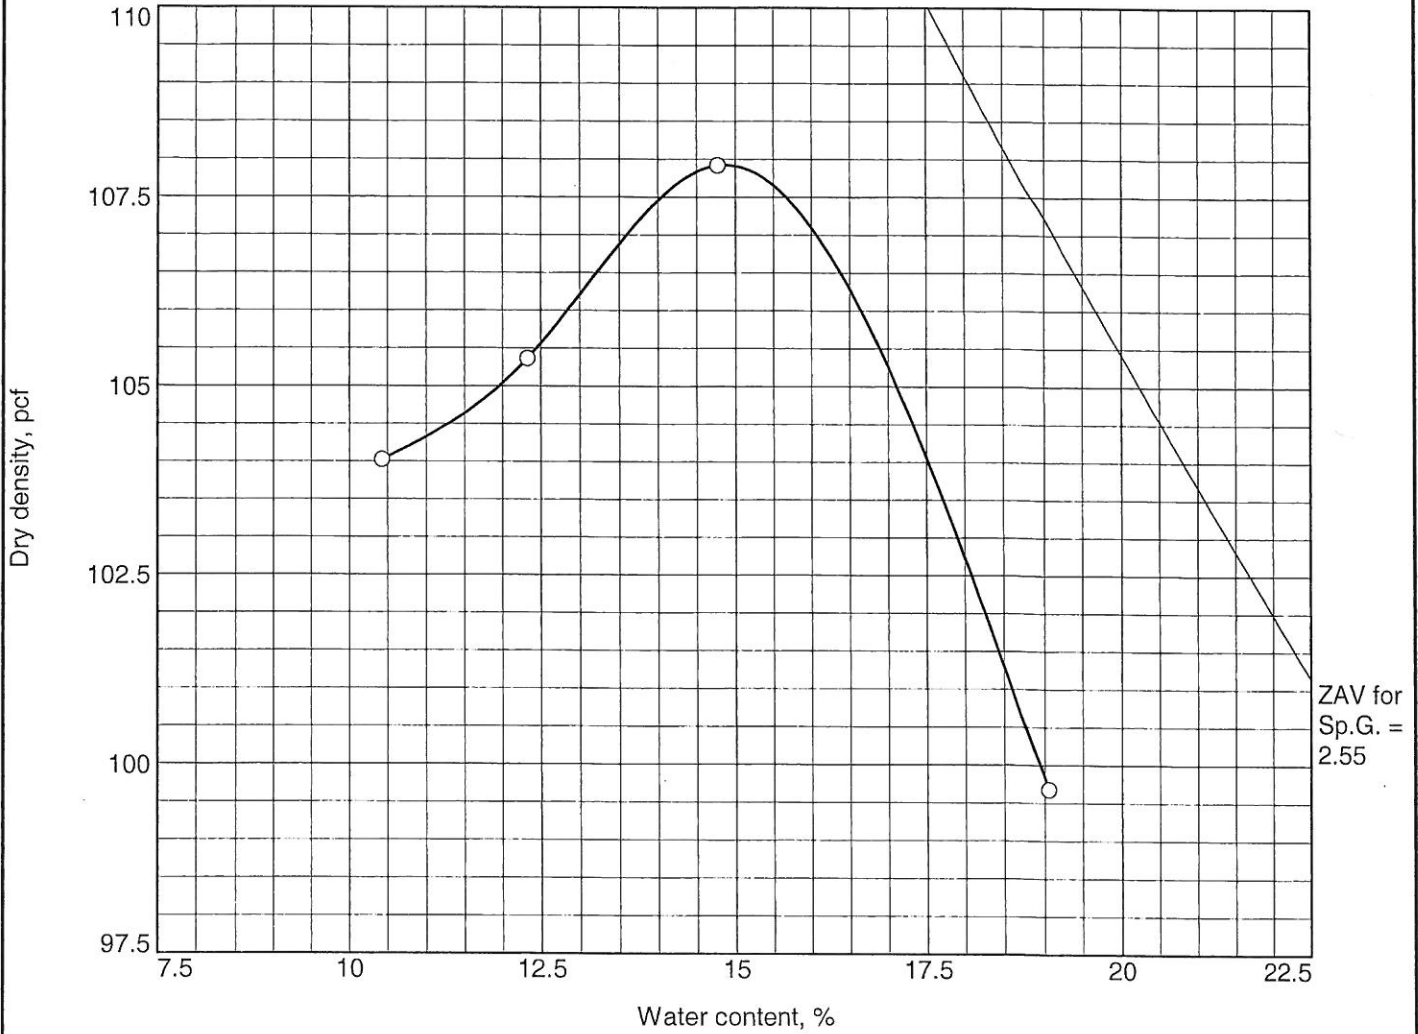


Test specification: ASTM D 1557-07 Method A Modified

Elev/ Depth	Classification		Nat. Moist.	Sp.G.	LL	PI	% > #4	% < No.200
	USCS	AASHTO						
							0.9	5.3

TEST RESULTS	MATERIAL DESCRIPTION
Maximum dry density = 108.0 pcf Optimum moisture = 15.0 %	FILL SAND RILITE PIT

Project No. 1009 Client: RILITE AGGREGATES Project: RILITE AGGREGATES-AGGREGATE QUALITY TESTING Location: PLANT STOCKPILE Sample Number: 27841	Remarks: RECEIVED 2/7/2013
---	--------------------------------------



Figure

Tested By: J. SMITH Checked By: S. VINEIS